


L mm	L inch	Eisen P/N	Coating
12	.47	805099-12	BLACK E-COAT/ZINC BLACK
14	.55	805099-14	BLACK E-COAT/ZINC BLACK
16	.63	805099-16	BLACK E-COAT/ZINC BLACK
18	.71	805099-18	BLACK E-COAT/ZINC BLACK

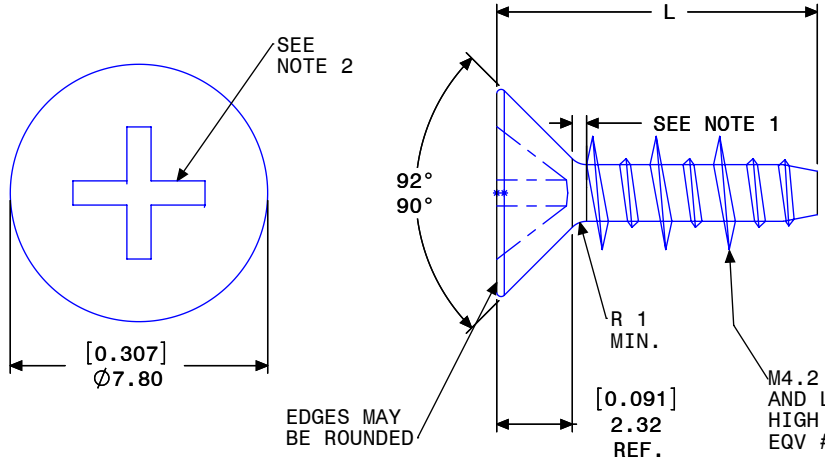

M4.2 x 1.41P DOUBLE LEAD HIGH AND LOW PROFILE SPACED THREAD  
HIGH THREAD MAJOR DIA 4.08 - 4.32  
EQV #8-18 HIGH LOW THREAD .157" OD

- NOTES:
- FULL FORM THREAD SHALL BE SUCH THAT SPECIFIED THREAD MINOR DIAMETER IS MAINTAINED TO 1.5 MAX FROM UNDERSIDE OF HEAD.
  - RECESS DATA:  
RECESS TYPE 1 PH  
DRIVER SIZE: NO. 2
  - MATERIAL: ALLOY STEEL CASE HARDENED
  - FINISH: BLACK E-COAT / ZINC BLACK PLATING
  - REFERENCE STANDARD ANSI 18.6.4

		UNLESS SPECIFIED, DEFAULT MILLIMETERS TOLERANCES: ANGLE: MACH ± 0.5° BEND ± 1° X ± 1 .X ± 0.2 .XX ± 0.025		NAME	DATE	<b>EISEN</b> LANSING, MICHIGAN 48911, USA
		GEOMETRIC TOLERANCES PER:	DRAWN	HG	20130212	
NEXT ASSY	USED ON	APPLICATION	ENG APPR	LK	20220606	
		MATERIAL	PROPRIETARY CONFIDENTIAL			TITLE:
		FINISH	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF EISEN ELECTRIC CORP. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF EISEN ELECTRIC CORP. IS PROHIBITED			4.2 X 1.41 BHL PH
		MASS	DO NOT SCALE DRAWING			SIZE DWG. NO.
		Grams				L 805099-QUICK
						REV
						1
						SCALE: 1:1
						SHEET 1 OF 1

EISEN